

PUBLISHED: 14-OCT-2019  
2020.0 DEFENDER (LE), 205-03

FRONT DRIVE AXLE/DIFFERENTIAL

## DIFFERENTIAL DRAINING AND FILLING (G2172807)

GENERAL PROCEDURES

### PART(S)

STEP	PART NAME	QUANTITY
Draining Step 6	Front differential drain plug	1
Filling Step 2	Front differential fill plug	1

## DRAINING

### NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1. Raise and support the vehicle on a suitable 2-post lift.

Refer to: [Jacking and Lifting](#) (100-02 Jacking and Lifting, Description and Operation).


2. Remove the engine undershield.

Refer to: [Engine Undershield](#) (501-02 Front End Body Panels, Removal and Installation).

- 3.


### NOTE:

If equipped.

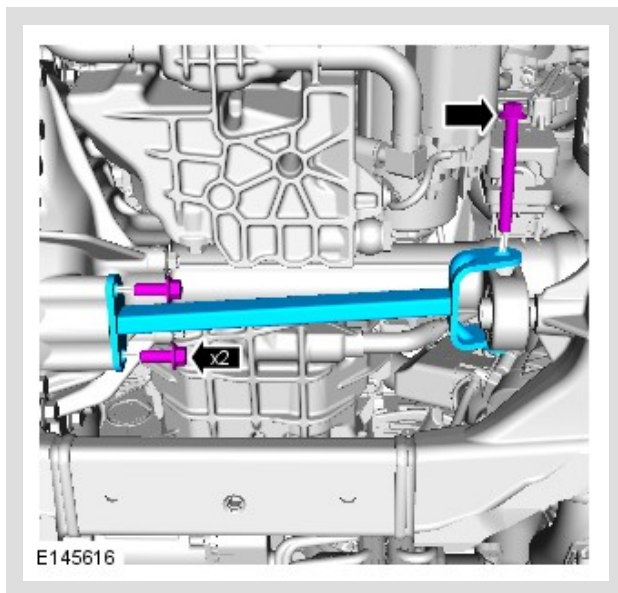


- Remove the 3 bolts.
- Remove the bracket.

4.


 **NOTE:**

Be prepared to collect escaping fluid.

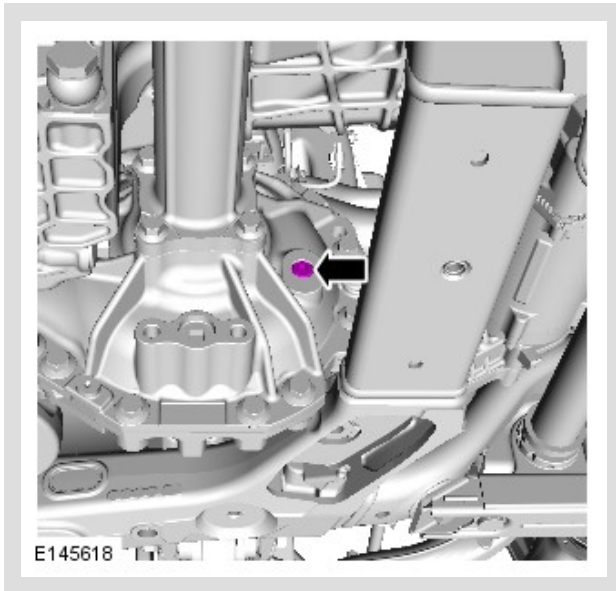

- Clean the front differential filler plug mating faces.
- Remove and discard the front differential filler bolt.

5.

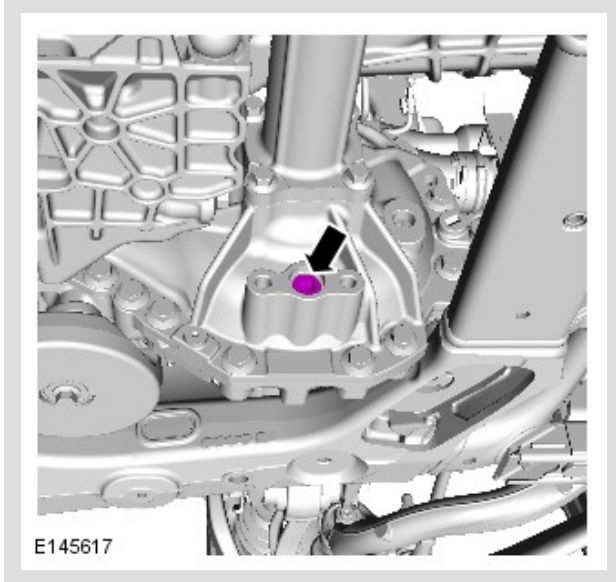

- Clean the front differential drain plug mating faces.
- Remove and discard the front differential drain bolt.

