

## TOW HITCH RECEIVER

### ⚠WARNING


Make sure the relevant safety warnings and cautions have been read and understood before towing a trailer. See 118, TOWING SAFETY.

The fitting of a tow hitch is required before towing. See 120, TOW HITCH.

**Note:** Make sure that safety chains are used and connected as shown.

### ⚠WARNING

Do not loop a safety chain over the tow ball. The safety chain may slide off, preventing correct operation in the event that the trailer becomes disconnected. Failure to correctly secure a safety chain could result in serious injury or death.

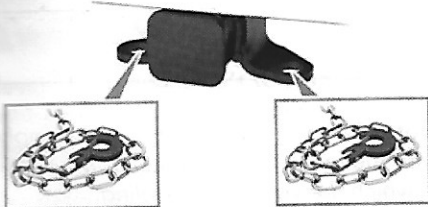

E249256


## TOW HITCH

### ⚠WARNING

Make sure the relevant safety warnings and cautions have been read and understood before towing a trailer. See 118, TOWING SAFETY.

The fitting of a tow hitch is required for towing with the tow hitch receiver.

The following tow hitch dimensions must be adhered to:

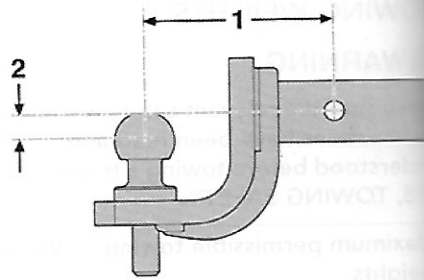

E194009

1. The maximum recommended length is 6.9 in (175 mm).
2. The maximum recommended ball height is:
  - Coil suspension: -0.6 in (-15 mm)
  - Air suspension: 1.3 in (35 mm).

### ⚠WARNING

Never leave the tow hitch loose in the vehicle. In the event of an accident, or during heavy braking, the tow hitch can become a projectile potentially causing serious injury or death.

If in any doubt about the fitment of a tow hitch, consult a retailer/authorized repairer.

## TOWING A TRAILER

### ⚠WARNING

Make sure the relevant safety warnings and cautions have been read and understood before towing a trailer. See 118, TOWING SAFETY.

Before towing a trailer, make sure both the vehicle and the trailer are being used in accordance with the manufacturer's recommendations, and any applicable legislation. See 119, TOWING WEIGHTS and 460, WEIGHTS.

Change low range in order to achieve a smoother pull away from standstill when towing a trailer weighing more than 4,425 lb (2,000 kg). Change to high range once the vehicle is moving. See 135, SELECTING HIGH AND LOW RANGE.

### NOTICE

To avoid overheating the transmission, it is not advisable to tow heavy loads at speeds of less than 20 mph (32 km/h) in high range. In these circumstances, select low range.

**Note:** A reduction in the performance of the Air Conditioning (A/C) system is normal under high load towing conditions. The touchscreen can display a rear-view image to assist when reversing the vehicle with a trailer attached. See 123, TOW ASSIST and 124, ADVANCED TOW ASSIST.

## HITCH ASSIST

### ⚠WARNING

Make sure the relevant safety warnings and cautions have been read and understood before towing a trailer. See 118, TOWING SAFETY.

Hitch assist displays a rear camera view on the touchscreen, to aid in the process of connecting a trailer. Hitch assist overlays an approximation of the towed position, and the intended steering direction.

### NOTICE

The driver is responsible for observing correct distances and manoeuvring the vehicle to a trailer's tow hitch. Failure to maneuver the vehicle accurately may result in damage to the vehicle and trailer.