



Hardware included 6 aluminum risers 4 at over an inch and 2 at about an inch – none of the bolt locations were a fit for these under the plate. No idea the intent, I am guessing they are meant for attaching additional Goose Gear items on the top of the plate, I queried but no response yet . The tie down hardware (bolts) were cheesy and I opted to use M8 stainless steel (M8-1.25 X 70MM).



I have a cargo / dog barrier, so I located a position using the OEM bracket as a guide to drill in a hole for the cargo barrier knob screws and used a T-Nut (M-8) to fasten to.




Right hand access hatch allows easy access to the OEM foam insert space. Actually, gives a little extra room as the floor plate lifts the rear of the floor about an inch.



There is an additional hole on both sides in the middle of the plate that go to nothing in the vehicle.

I bought the "Expanda" adjustable fridge slide from Atlantic British, shown here fully extended it allows full access to the jack tools through the access hatch in the floor plate.

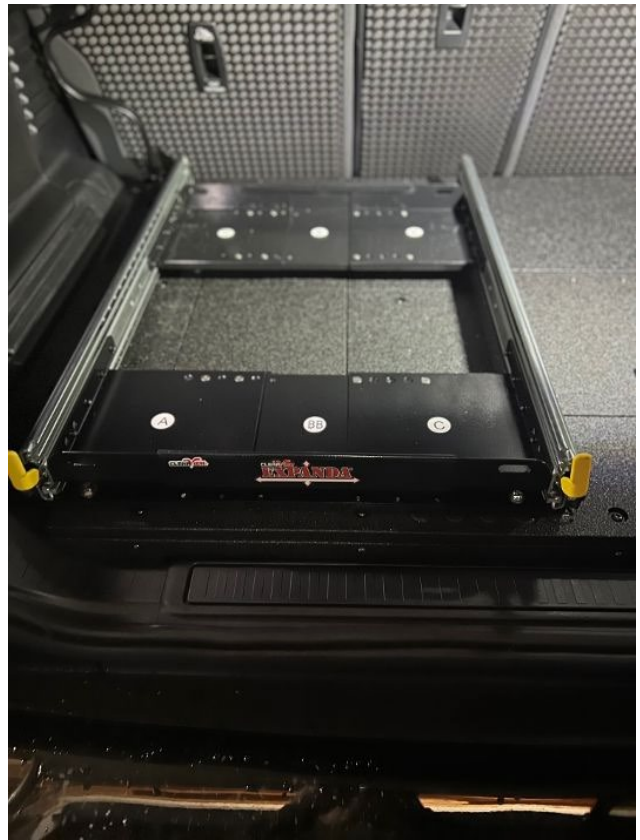



Remember to attach this finish piece before you place the floor plate into the truck

