


- Sealant applicator gun.
- Suction cups.
- A felt covered table or stand to support glass.

WARNING: Wear protective gloves when handling glass, solvents and primers.

WARNING: Wear suitable eye protection when removing and refitting glass.

WARNING: If glass has splintered, protect eyes and operate demister blower to remove glass from heater ducts. Use a vacuum cleaner to remove glass from fascia, carpet and seats.

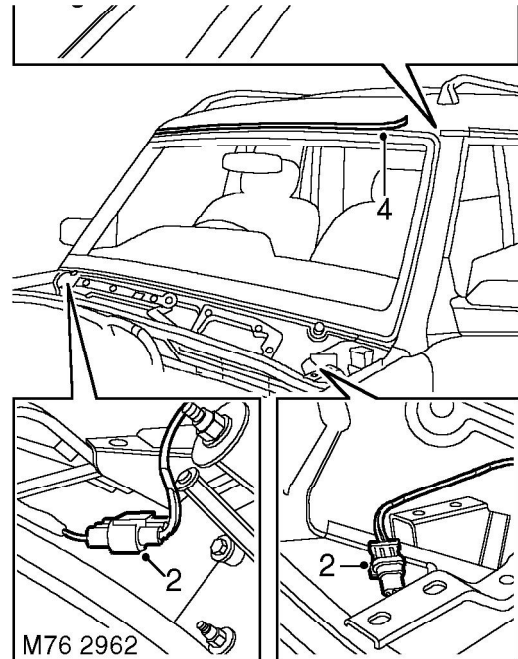

2. If fitted, disconnect screen heater multiplugs.
3. Remove top corner trim finishers from body.
4. Remove windscreen top finisher and discard.

