


## LIGHTING

### Lamp - stop - centre high mounted (CHMSL)

86.41.32

Remove

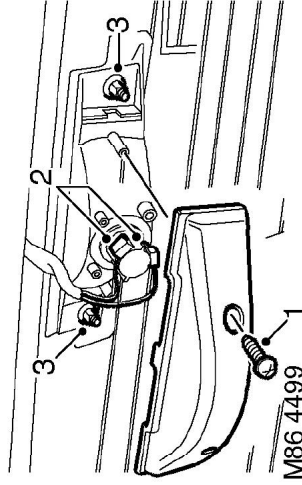

1. Remove 2 screws securing lamp cover and remove cover.
2. Disconnect Lucar connectors from lamp bulb holder.
3. Remove 2 nuts securing lamp to rear screen and remove lamp.


Refit

1. Fit new lamp to screen and secure with nuts.
2. Connect Lucar connectors to lamp bulb holder.
3. Fit lamp cover to lamp and secure with screws.

### Lamp - tail/flasher - bumper

86.41.42

Remove

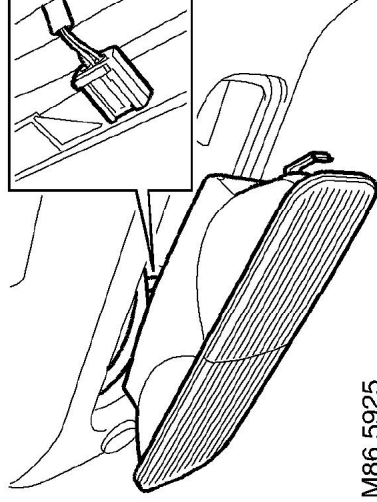

1. Release tail lamp from bumper.
2. Disconnect multiplug and remove lamp.

Refit

1. Position tail lamp, connect multiplug and secure lamp to bumper.