

## WIPERS AND WASHERS


### Switch - wiper and washer - windscreen

🔑 84.15.34

**WARNING:** It is imperative that before any work is undertaken on the SRS system the appropriate information is read thoroughly.

#### Remove

1. Remove rotary coupler.  
👉 **RESTRAINT SYSTEMS, REPAIRS, Rotary coupler.**

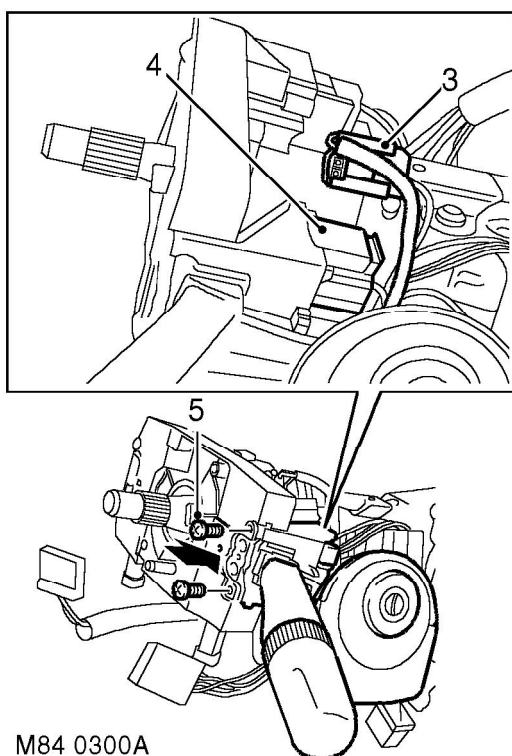

M84 0300A

2. Release passive coil from steering column lock and lower the coil without disconnecting the harness.
3. Release front wiper delay multiplug from column switch mounting bracket and disconnect from harness.
4. Disconnect harness multiplug from wiper switch.
5. Remove 2 screws securing switch, carefully raise edge of switch bracket to clear location peg and remove switch.

#### Refit

1. Fit new switch to bracket and secure with screws.
2. Connect harness multiplug to switch.
3. Connect front wiper delay multiplug and fit multiplug to switch bracket.
4. Fit passive coil to column lock.
5. Fit rotary coupler.  
👉 **RESTRAINT SYSTEMS, REPAIRS, Rotary coupler.**