


Navigation System Compact Disc (CD) Unit (86.53.01)

Removal

1. Disconnect the battery ground cable. For additional information, refer to [Specifications](#) (Section 414-00)
2. Make the SRS system safe. For additional information, refer to [Standard Workshop Practices](#) (Section 100-00)
3. Remove the LH front seat. For additional information, refer to [Front Seat \(78.10.44/99\)](#) (Section 501-10)
4. Remove the CD unit.
 - ▶ Remove the 4 bolts.
 - ▶ Disconnect the antenna cable.
 - ▶ Disconnect the 2 electrical connectors.

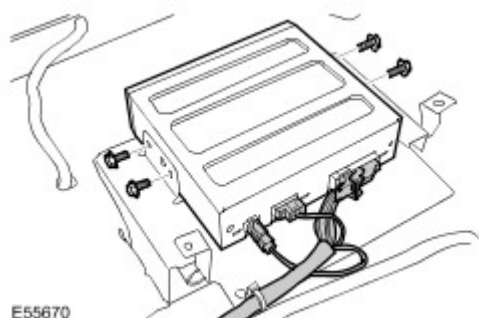

Installation

1. Install the CD unit.
 - ▶ Tighten the bolts to 6 Nm (4 lb.ft).
 - ▶ Connect the electrical connectors.
 - ▶ Connect the antenna cable.
2. Install the LH front seat. For additional information, refer to [Front Seat \(78.10.44/99\)](#) (Section 501-10)
3. Connect the battery ground cable. For additional information, refer to [Specifications](#) (Section 414-00)