

PUBLISHED: 21-NOV-2016  
2017.0 DISCOVERY (LR), 501-14

HANDLES, LOCKS, LATCHES AND ENTRY SYSTEMS

# LIFTGATE LATCH (G1948012)

REMOVAL AND INSTALLATION

76.37.17	LATCH - TAILGATE - RENEW	ALL DERIVATIVES	0.2	USED WITHINS
----------	--------------------------------	--------------------	-----	-----------------

REMOVAL

## CAUTION:


Make sure to protect the paintwork.

## NOTE:

Removal steps in this procedure may contain installation details.

1. Remove the battery ground cable.  
Refer to: Specifications (414-00, Specifications).

2.

 NOTE:

Do not remove the component at this stage.



Release the trim panel.

*Torque: 3 Nm*

3.




Remove the tailgate trim panel.

4.




Remove the cap.

5.

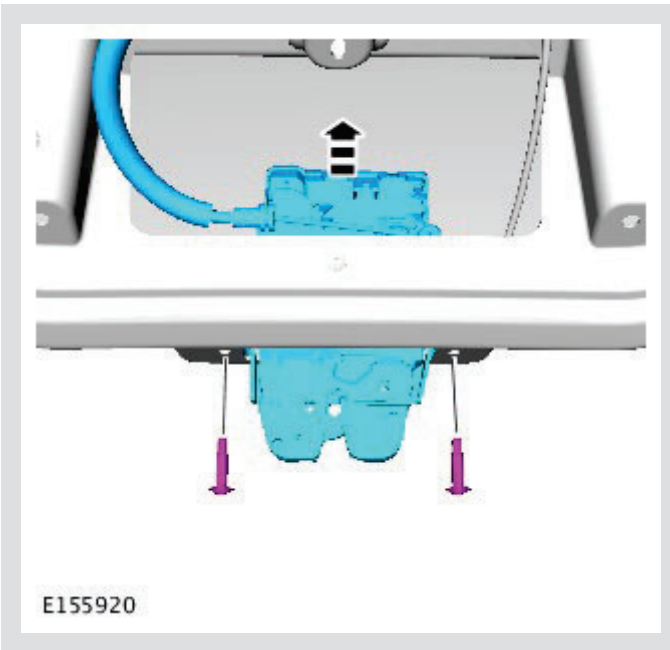

*Torque: 10 Nm*


6.

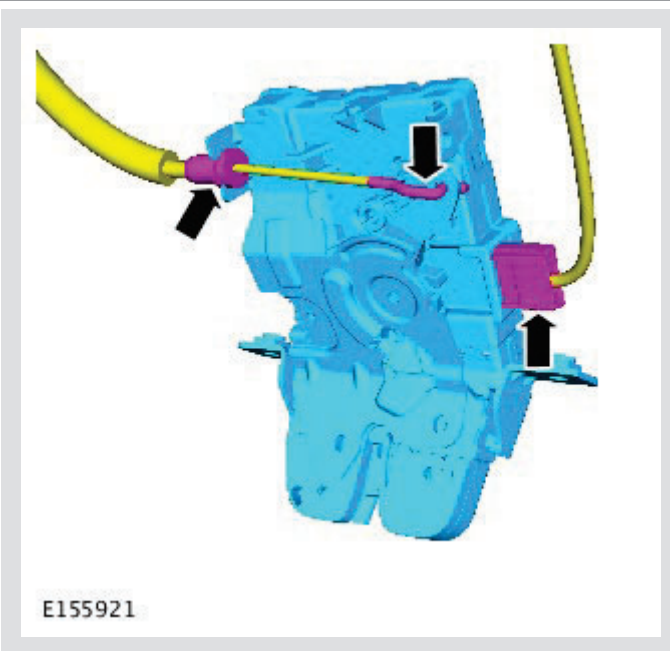

Disconnect the cable.

**INSTALLATION**

1.

 NOTE:

Install new retaining clips.

To install, reverse the removal procedure.